



SPECIFICATIONS

1. Scope of Work:

- a. Bush (uprooted) and vegetation clearing on the surface, slope, and, the edges of the drainage channel to eliminate hibernating site for land or water dangerous animals as well as hiding sites for criminals.
- b. Grass cutting to be not more than 100mm above the ground
- c. Removal of natural stream pollutants and foreign objects to unblock normal flow.
- d. No protected tree species beyond 1.5m from the stormwater edge shall be destroyed.
- e. Loading and the disposal of debris, trash and sedimentation particles.
- f. Area to each site may not exceed extent provided in Table 2 below.

2. Extent of area

Table 2

Area	Description	Extent
1	Fire Station and Old Musina Hospital	0.6504ha.
2	Below Truck Park & North of Musina Mall Access Gate	0.6390ha.
3	Patrick Jele Crest & Skoonplaas Stadium netball Court	0.1591ha.
4	Below Ruawanda & Skoonplaas Settlement	2.2972ha.
Total		3.77457ha


NB:

Arial photo graphs are attached indicating each area as described in Table 2 above.

Fire Station and Old Musina Hospital

5/10/24, 12:24 PM

Google Maps

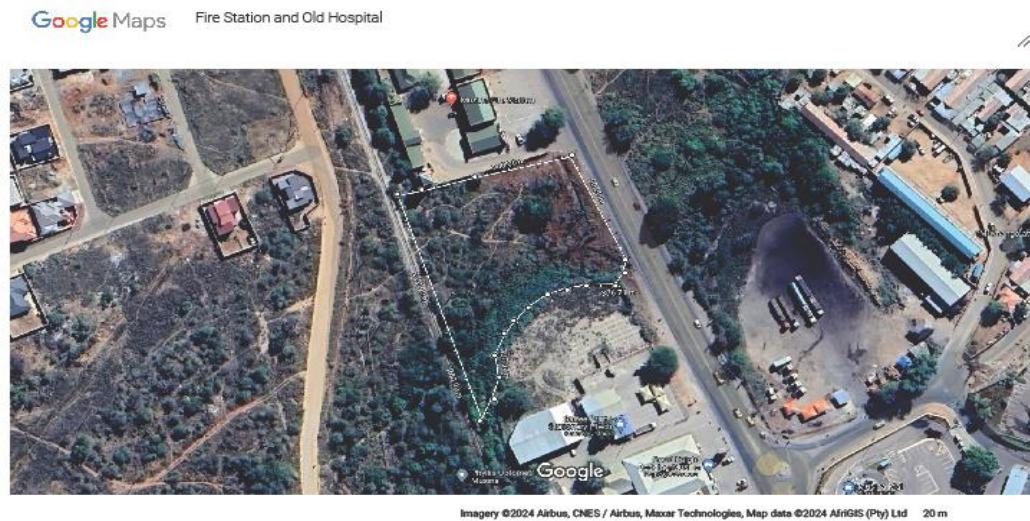

Below Truck Park & North of Musina Mall Access Gate

5/10/24, 12:27 PM

Google Maps



Patrick Jele Crest & Skoonplaas Stadium netball Court

5/10/24, 12:32 PM


Google Maps



Below Ruawanda & Skoonplaas Settlement

5/10/24, 12:40 PM

Google Maps

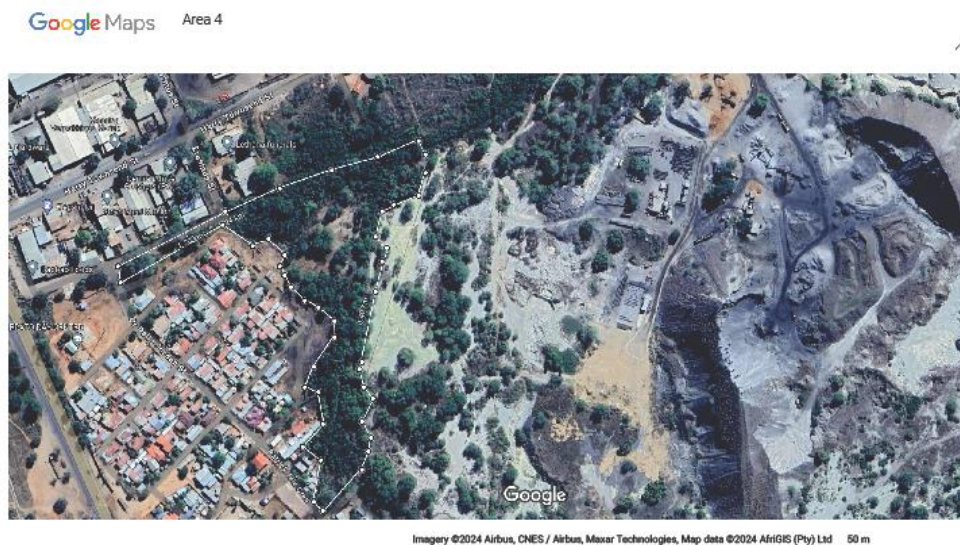

3. Existing Conditions

- a. Existence and continuous sewage flow in the stormwater drainage channels
- b. The bulk water and sewer pipes on the surface as well as underground
- c. Transnet railway infrastructure
- d. Municipal electrical and road infrastructure
- e. Partial lined stormwater drainage channel
- f. Aqua animals
- g. Vegetation (medium to dense)
- h. Unstable and soft grounds
- i. Informal peasants

4. Conditions for work execution

- a. No work will be allowed without both the Local Municipality and the Vhembe District Municipality representative on site
- b. All exiting service to be identified and protected before physical works executions.
- c. Transnet toe earthworks not to be disturbed during the vegetation control and the clearing.
- d. No damage to existing infrastructure will be accepted.
- e. Failure to comply with the conditions of works execution will automatically nullifies the order. The service provider will be liable for the repairs of the damaged infrastructure.
- f. The municipality will cancel the order for poor performance by the service provider.
- g. No compensation will be made toward terminated order due to poor performance by the service provider.

5. Plant Requirements

Service provider is advised to assess the exiting conditions such that relevant and adequate plants are provided for the identified Scope of Work.

6. Price / Offer

- 1.1 R_____ for 3.77457ha all incl. (taking into consideration plant establishment, security, works execution and de-establish the plant)
- 1.2 Service Provider Production Capability
Number of days required to satisfactory complete the Scope of Works_____Day(s)